

CAD

C


A

B

D


E

F

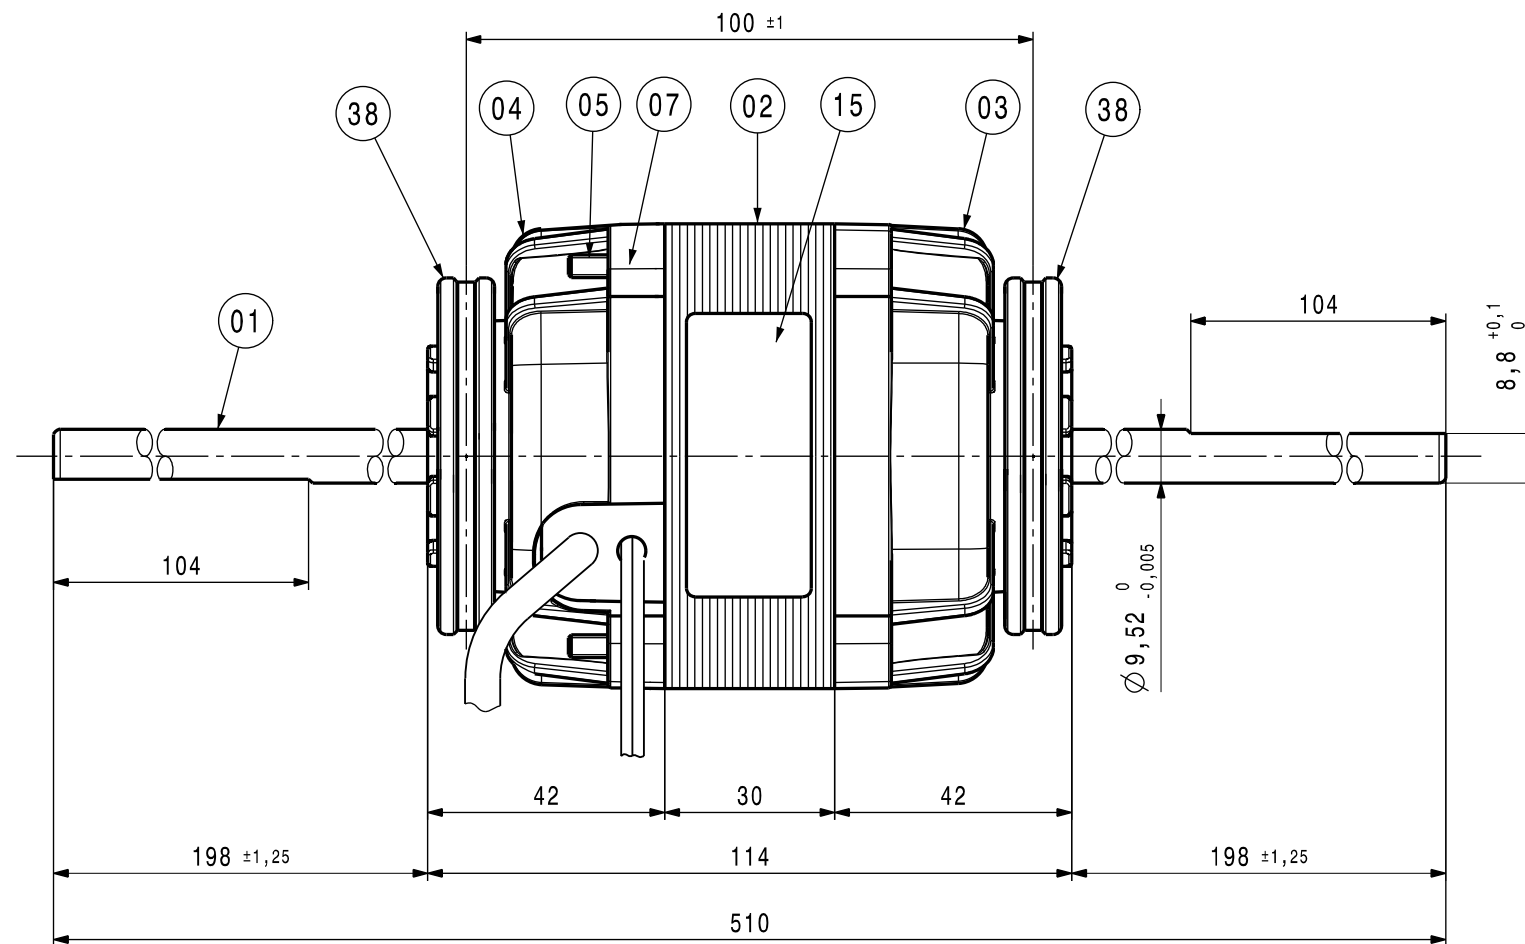

Caution :
In application to assemble with :
(In applicazione assemblare con :)
N°1 SUPPORT COD.1-045-1022
N°2 SPRING COD.1-050-086

CLASS "B" MOTOR - SLEEVE BEARING MANUFACTURED (Motore in Classe "B" - Esecuzione a Bronzine)	
AXIAL CLEARANCE (Gioco Assiale)	0,5 - 2,5 mm
COVER - CABLE SIDE (Coperchio Lato Cavi)	CLOSED (Chiuso)
COVER - OPPOSITE CABLE SIDE (Lato Opposto Cavi)	CLOSED (Chiuso)
ASSEMBLY SPECIFICATION (Normativa Note di Montaggio)	EL.UN.0002
MECHANICAL SPECIFICATION (Normativa di Controllo Meccanico)	EL.CM.0001
ELECTRICAL SPECIFICATION (Controllo Elettrico con Prescrizione N°)	M.2046/3

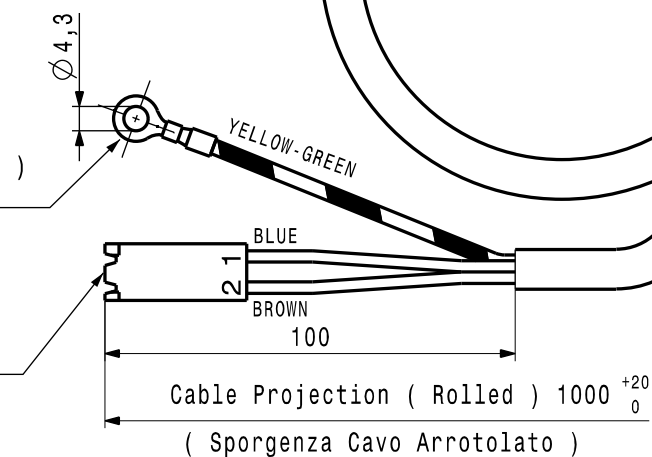

Ring Terminal
(Capocorda ad Occhiello)
1-040-064

Straight Receptacles 6.3
 (Faston Femmina) 1-040-134
 2 Ways Housing
 (Blocchetto a Due Vie) 1-072-987

CODE: BTNB41TB0236
TYPE: 1BT 27-30-1V NA

230/240V~ 50/60Hz TH.PROT. INS.CL.B
C=1,5μ 450VL 27/86W 0,38A 1100Rpm

C=2μ 450VL 32/100W 0,43W 1100Rpm
← ROTATION
DATA

BLUE	LINE
BROWN	LINE

YELLOW
GREEN = C
YELLOW/GREEN



Rel	Date	Description	Executor signature	Checked

For dim. without tollerance
see standard UNI EN 22768-mK

ELCO®

Drawn Pedrin R.
Date 24-02-2009
Check T.Sirtori
Scale ---

	Treatment	_____
K	Material	_____

SINGLE PHASE MOTOR (Motore Monofase)
230/240V - 50/60Hz
1BT 27-30-1V NA

Weight .	Release
Ref.No .	
BTNB41TB0236	

THIS DRAWING IS OUR PROPERTY. ANY PARTIAL OR COMPLETE COPY IS FORBIDDEN WITHOUT PREVIOUS WRITTEN AUTHORISATION